RS1A THRU RS1M Fast Recovery Rectifier Diodes

Features

- $I_{F(AV)}$ 1A
- V_{RRM} 50V-1000V
- High surge current capability
- Polarity: Color band denotes cathode

Applications

- Rectifier

Marking

- RS1X

X：From A To M

Limiting Values(Absolute Maximum Rating)

Item	Symbol	Unit	Test Conditions	RS1						
				A	B	D	G	J	K	M
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V		35	70	140	280	420	560	700
Maximum DC Blocking Voltage	V_{DC}	V		50	100	200	400	600	800	1000
Average Forward Current	$I_{F(AV)}$	A	60Hz Half-sine wave, Resistance load, T_L(Fig.1)	1.0						
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz Half-sine wave, 1 cycle, Ta=25℃	30						
Operation Junction and Storage Temperature Range	T_J,T_{STG}	℃		-55 ~ +150						

Electrical Characteristics (T=25℃ Unless otherwise specified)

Item	Symbol	Unit	Test Condition		RS1						
					A	B	D	G	J	K	M
Peak Forward Voltage	V_F	V	I_F=1.0A		1.3						
Maximum reverse recovery time	t_{rr}	ns	I_F=0.5A,I_R=1.0A,I_{rr}=0.25A		150				250	500	
Peak Reverse Current	I_{RRM1}	μA	V_{RM}=V_{RRM}	T_j=25℃	5						
	I_{RRM2}			T_j=125℃	50						
Thermal Resistance(Typical)	$R_{\theta J-A}$	℃/W	Between junction and ambient		55						
	$R_{\theta J-L}$		Between junction and terminal		25						

Notes:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

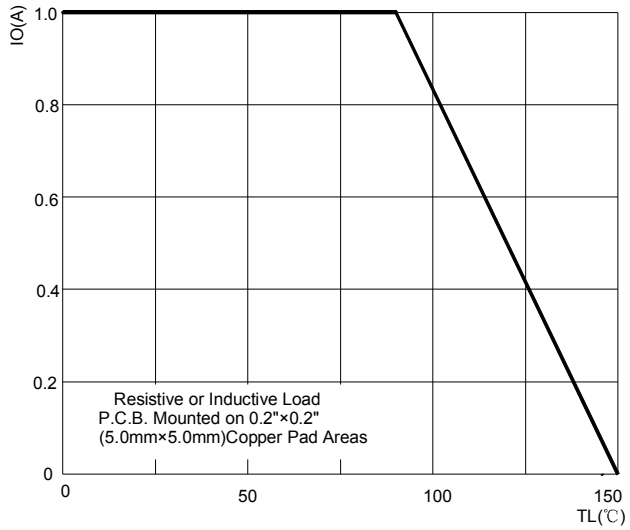

FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

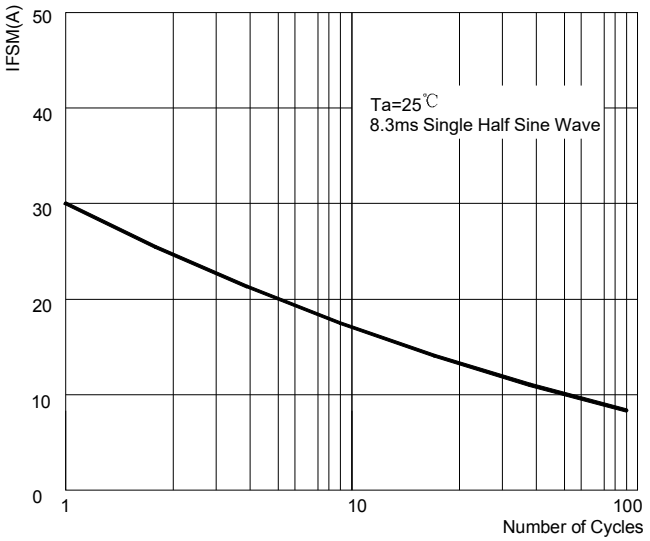

FIG.3: TYPICAL FORWARD CHARACTERISTICS

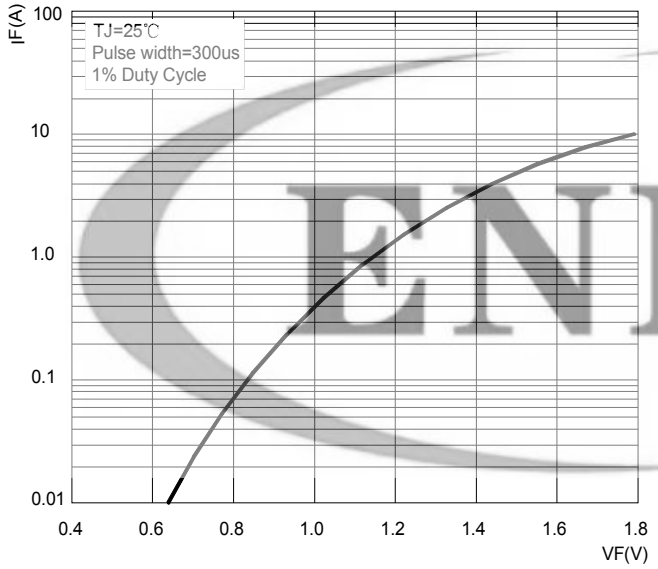

FIG.4：TYPICAL REVERSE CHARACTERISTICS

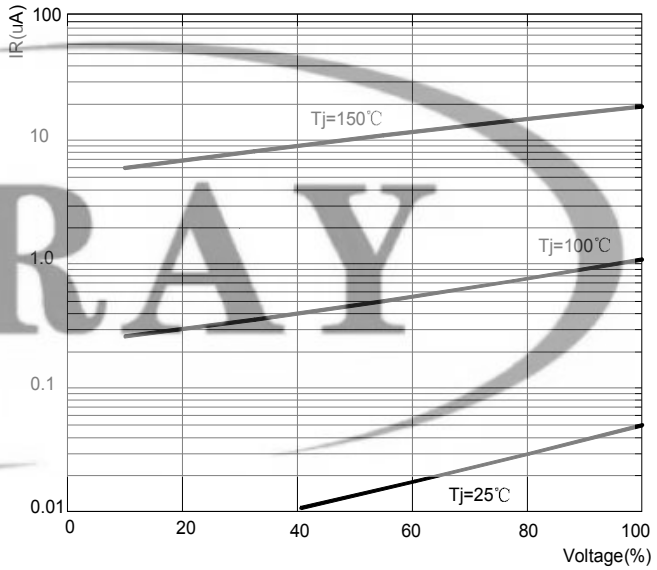

FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

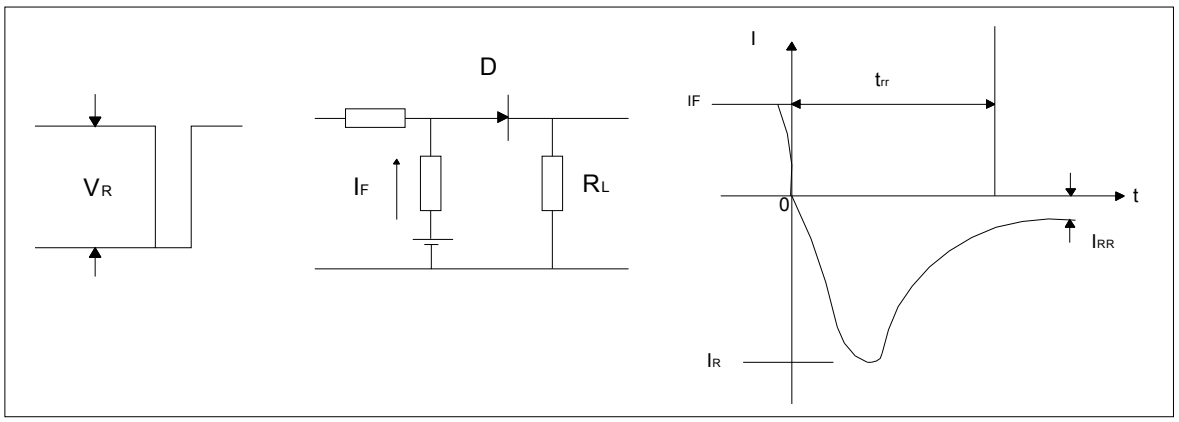

ENRAY

SMA Package Outline Dimensions

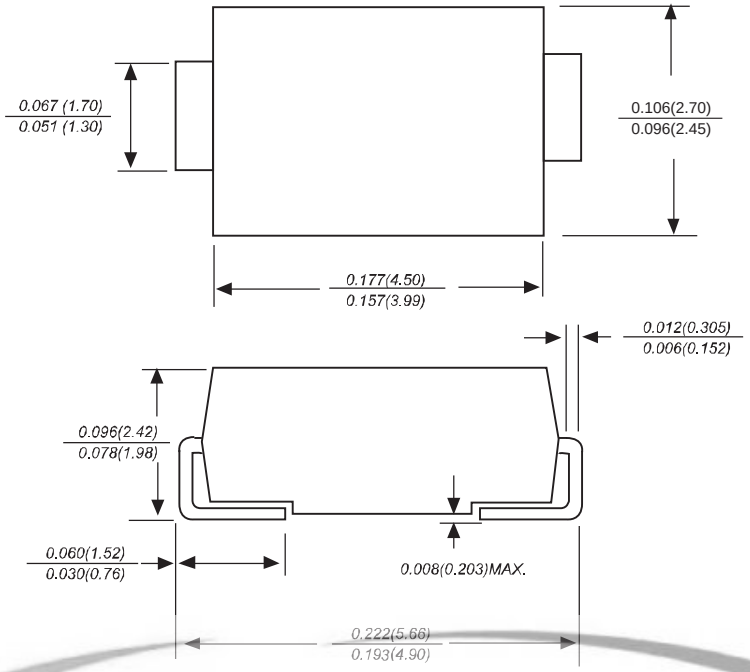

Dimensions in inches and (millimeters)

ENRAY

SMA Suggested Pad Layout

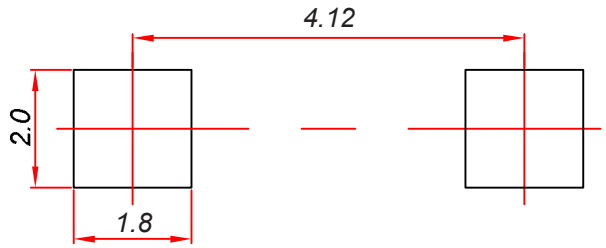

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.